

## 1750 BOURGOGNE

«Mini» version in the round flush recessed raking light range.


### APPLICATIONS:

- Highlight architectural features, street furniture, landscape...
- Surface mounted lighting for cycle path, pedestrian path, stairs
- Squares and public places

### CARACTERISTICS

Colourless anodised machined aluminium body

- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1750K and 1750DS)
- 3 possible recess dimensions
- Withstands occasional traffic from all kinds of vehicles (1750 & 1750H)

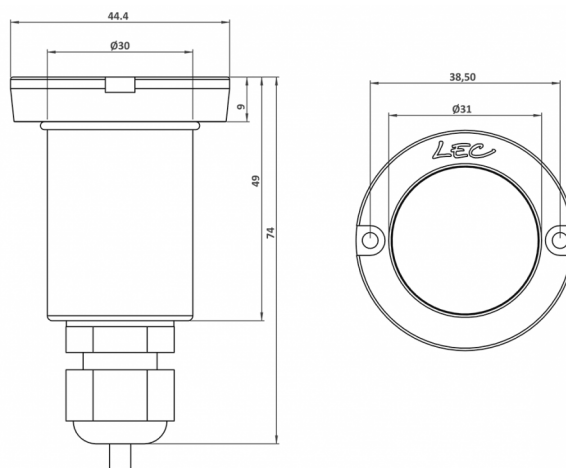

Number of LEDs	1
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1750-bourgogne-r121>

### APPLICATION



#### Outdoor lighting

Standard flux : **223 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Ground flush recessed fittings



Ground recessed fittings



Pavements sides

### CARACTERISTICS

Weight : **130 g**

### Options of luminous effects



20° deflected beam (option)



Non adjustable



Beam with various openings



Transparent flat window

### Power supply - Control



Cable length: **1 m**



**Integrated** : 24V-PWM  
**Remote** : 24V-0/10V, 24V-DMX, 24V-DALI

### Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



Withstands random all vehicles traffic



Resists impacts up to IK10  
**60J**



Tight for extended immersion

## 1750 BOURGOGNE

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/1750-bourgogne-r121>

