

5655 LIGNON

Light bar can be ordered to length (max. 2m) for individual installation or as a continuous line for uninterrupted lighting.



The product's polycarbonate and aluminium profiles are clipped together to allow for every possible product orientation. Cable output at the end of the fitting. Slightly diffusing polycarbonate window to avoid glare. Built-in groove to accommodate nuts to adjust the position of the mounting bracket. Multiple types of installation possible: cornice, wall, handrail, integration into street furniture, etc. A wide choice of mounting brackets are also available. Minimum length = 100mm

APPLICATIONS:

- Highlight architectural features,
- Lighting from a cornice
- Lighting under benches or handrails
- Continuous line

CARACTERISTICS

- Vandal-resistant diffusing polycarbonate window
- Colourless anodised aluminium sleeve with integrated groove for M4 nuts (fixing)
- Cable outlet in line with axis
- Accessories: PF mounting brackets for cornice / PF1 adjustable / PF2 for facade
- RGB option available

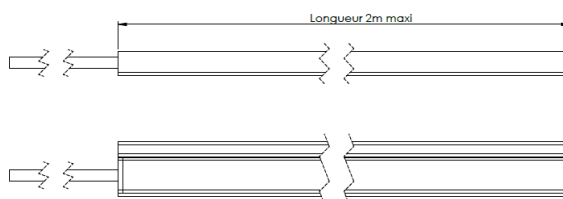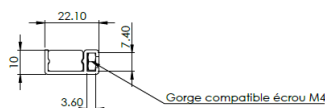

Number of LEDs	120
Type of LEDs	120° SMD LEDs (S), 120° high intensity SMD LEDs (Z)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5655-lignon-r1305>

APPLICATION



Outdoor lighting

Standard flux : **1452 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Wall lights



Handrails

CARACTERISTICS

Weight : **300 g/m**

Options of luminous effects



RGB options



Non adjustable



Transparent flat window

Power supply - Control



Cable length: **0.2 m**



Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DIMX, 24V-DALI

Material



Anodised glazed aluminium

Mechanical strength - Waterproofness

IK06 Resists impacts up to IK06

IP66 product.legend-immersion.66

5655 LIGNON

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5655-lignon-r1305>

