
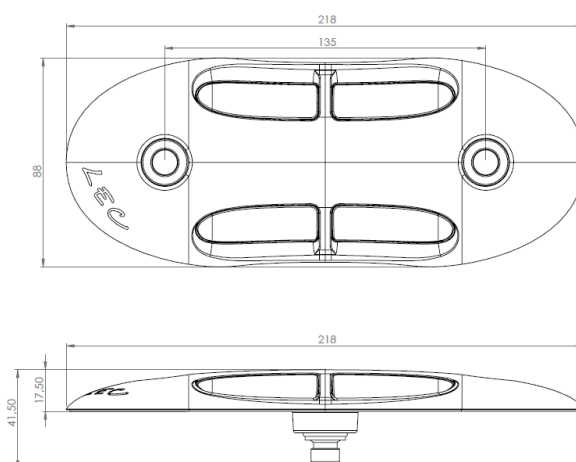


## 1844CR1 SAINT RAPHAEL

### CARACTERISTICS

Fireproof safety cable CR1-C1

- Cast aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Attaches directly to roadway or to recess plate

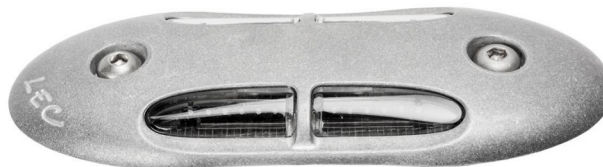

Number of LEDs	24
Type of LEDs	Wide angle 5 mm LEDs (H)
Color(s)	Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1844cr1z-saint-raaphael-r2124>

### APPLICATION

- Marker-lighting

### CONFIGURATEUR.EMPLACEMENT

- Ground recessed fittings

### CARACTERISTICS

Weight : 570 g

### Options of luminous effects

- Non adjustable
- Paralell beam
- Transparent dome (optional)

### Power supply - Control

- Cable length: 2 m CR1

**Integrated :** 24V-PWM  
**Remote :** 24V-0/10V, 24V-DMX, 24V-DALI

### Material

- Marine anodised cast aluminium

### Mechanical strength - Waterproofness

**IP69 K** pressure water spray (previous registration)

Protrusion which is an obstacle for 2-wheels vehicles and pedestrians. The unit should be permanently lit to draw attention to the obstacle.

Withstands low-speed light vehicles traffic

Certified in compliance with European Standards 60598-2-22 for emergency lighting units

**2,5T** Resists compression up to 2,5 tons

**IK10 60J** Resists impacts up to IK10 60J

**IP68** Tight for extended immersion