

1830CYC LUCERNE

«Medium» version in the round flush recessed raking light range. Choice of lighting effects for customised LED marker-lighting.

APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

CHARACTERISTICS

Beacon with specific bike path signage
LEC offers custom options


- Anodised aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
- Flush-recessed (except 1830K and 1830D)

Withstands occasional traffic from all kinds of vehicles

- RGB options available



Modèle déposé
(Europe)

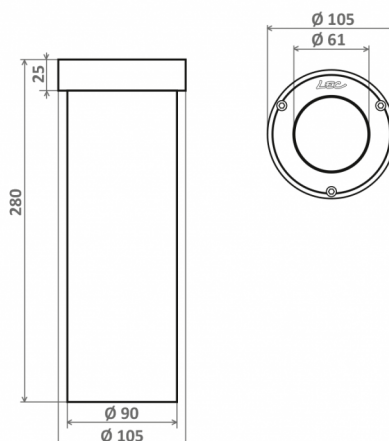

| | |
|----------------|--|
| Number of LEDs | 36 |
| Type of LEDs | 120° SMD LEDs (S) |
| Color(s) | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1830cycz-lucerne-r2428>

APPLICATION

- ☒ Marker-lighting

CONFIGURATEUR.EMPLACEMENT

- ☒ Ground flush recessed fittings
- ☐ Ground recessed fittings
- ☐ Pavements sides

CHARACTERISTICS

Weight : 290 g

Options of luminous effects

- ☒ RGB options
- ☒ Adjustable on 1 axis
- ☐ Flat homogeneous window (optional)
- ☐ Colour control system (optional)

Power supply - Control

- ☒ Cable length: 1 m
- ☒ Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI
- ☐ Integrated : 230V-Non dimmable

Material

- ☒ AL Anodised glazed aluminium
- ☒ PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

- ☒ Withstands random all vehicles traffic
- ☒ IK10 60J Resists impacts up to IK10 60J
- ☒ IP68 Tight for extended immersion