

5754

CLEM-IN

Linear recessed projector for public spaces.

Orderable in 4 lengths, it allows individual or continuous line installations.

With the very extensive asymmetrical optics, homogeneous lighting is obtained even for a grazing installation.

Anti-vandalism installation by clipping (no screw).

CARACTERISTICS

Length with recess = 540mm

Vandal-proof organic glass profile

Clear anodized aluminum sheath



Without protrusion

Cable outlet on the underside

6 LEDs 700mA controlled in PWM

Four-color option possible: 4x4

350mA LEDs controlled in PWM

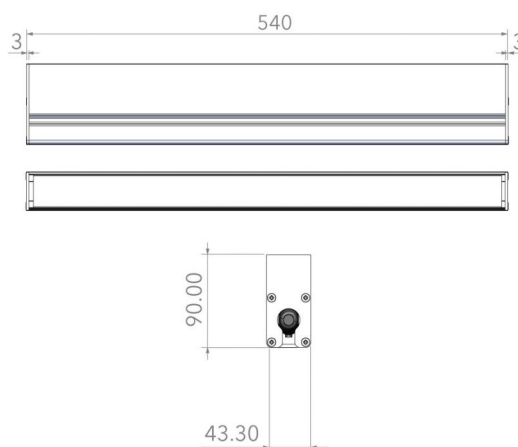

| | |
|----------------|--|
| Number of LEDs | 6 |
| Type of LEDs | Power LEDs. Contact us for hot countries. |
| Color(s) | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5754-clem-in-r2517>

APPLICATION



Outdoor lighting

Standard flux : **1338 lm**

This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)

CONFIGURATEUR.EMPLACEMENT



Ground flush recessed fittings



Ground recessed fittings

CARACTERISTICS

Weight : **500 g**

Options of luminous effects



RGBW option



Non adjustable



Beam with various openings



Transparent flat window



Colour control system (optional)

Power supply - Control



Cable length: **1 m**



Integrated : 24V-PWM
Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material



Anodised glazed aluminium



Vandalism-proof organic glass

Mechanical strength - Waterproofness



Withstands random all vehicles traffic



Resists impacts up to IK10 60J



Tight for temporary immersion

5754 CLEM-IN

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5754-clem-in-r2517>

