

## 2855H METEOR

«Maxi» version in the round flush recessed raking light range.


### APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs
- Public space enhancement

### CARACTERISTICS

Uniform lighting

- Colourless anodised aluminium body and flange
- Vandalproof organic glass window
- 316L Stainless steel screws
- Installs in dedicated recess plate
- RGB options available

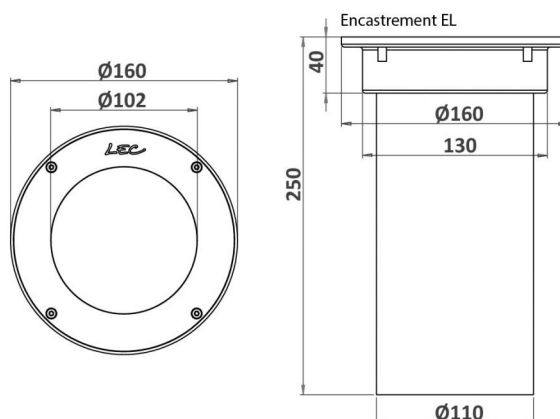

|                |                                                                                                                                    |
|----------------|------------------------------------------------------------------------------------------------------------------------------------|
| Number of LEDs | 45                                                                                                                                 |
| Type of LEDs   | 120° SMD LEDs (S)                                                                                                                  |
| Color(s)       | Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L) |

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/2855hz-meteor-r859>

### APPLICATION

- ☒ Marker-lighting

### CONFIGURATEUR.EMPLACEMENT

- ☒ Ground flush recessed fittings
- ☐ Ground recessed fittings

### CARACTERISTICS

Weight : 590 g

### Options of luminous effects

- ☒ RGB options
- ☒ Non adjustable
- ☐ Flat homogeneous window (optional)
- ☐ Colour control system (optional)

### Power supply - Control

- ☒ Cable length: 1 m
- ☒ Integrated : 24V-PWM  
Remote : 24V-0/10V, 24V-DMX, 24V-DALI
- ☐ Integrated : 230V-Non dimmable

### Material

- ☒ AL Anodised glazed aluminium
- ☒ PC 2 Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness

- IK10** Resists impacts up to IK10
- 60J**
- IP68** Tight for extended immersion