

## 5533 SOULARY

Cable-suspended spotlight for street lighting.


Orientable beam (+/-10°) without opening the spotlight and without compromising its water resistance.

### APPLICATIONS:

- Cycle paths and pedestrian paths lighting
- Public space lighting

### CARACTERISTICS

- Colourless anodised machined aluminium body
- Aluminium cap with thermolacquered paint finish, RAL of your choice
- Vandalproof organic glass window

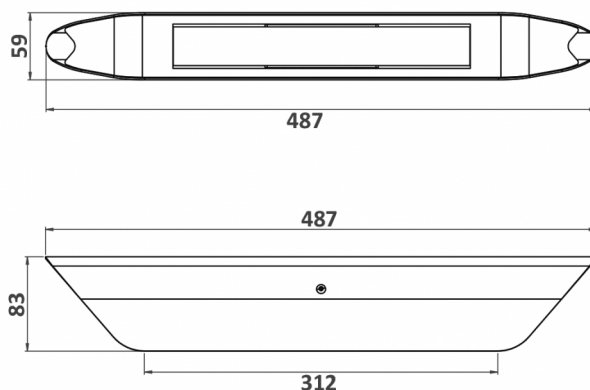

Number of LEDs	6
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/5533-soulary-r876>

### APPLICATION



#### Outdoor lighting

Standard flux : **1338 lm**

*This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)*

### CONFIGURATEUR.EMPLACEMENT



Overhead catenary lights

### CARACTERISTICS

Weight : **1100 g**

### Options of luminous effects



RGB options



Adjustable on 1 axis



Rotating beam



Beam with various openings



Transparent flat window



Colour control system (optional)

### Power supply - Control



Cable length: **1 m**



**Integrated :** 48V-PWM  
**Remote :** 48V-0/10V, 48V-DMX, 48V-DALI

### Material



Anodised glazed aluminium



Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

### Mechanical strength - Waterproofness



**IK10** Resists impacts up to IK10  
**20J**



**IP67** Tight for temporary immersion

## 5533 SOULARY

This datasheet gives you all the available optics for this product, consistent with the number of LEDs.

URL of this product: <http://www.lec-lyon.com/5533-soulary-r876>

