

1530R BORDEAUX


«Mini» version in the round flush recessed raking light range. The flange hides recess plate imperfections.
RGB option available.

APPLICATIONS:

- Decorative or safety marker-lighting
- Installed at regular intervals to mark a path, cycle path, stairs,...
- Public space enhancement

CARACTERISTICS

- Colourless anodised machined aluminium body (except 1530RX)
- Vandalproof organic glass window
- Recess in or attach to walls, bollards, poles or other supports.

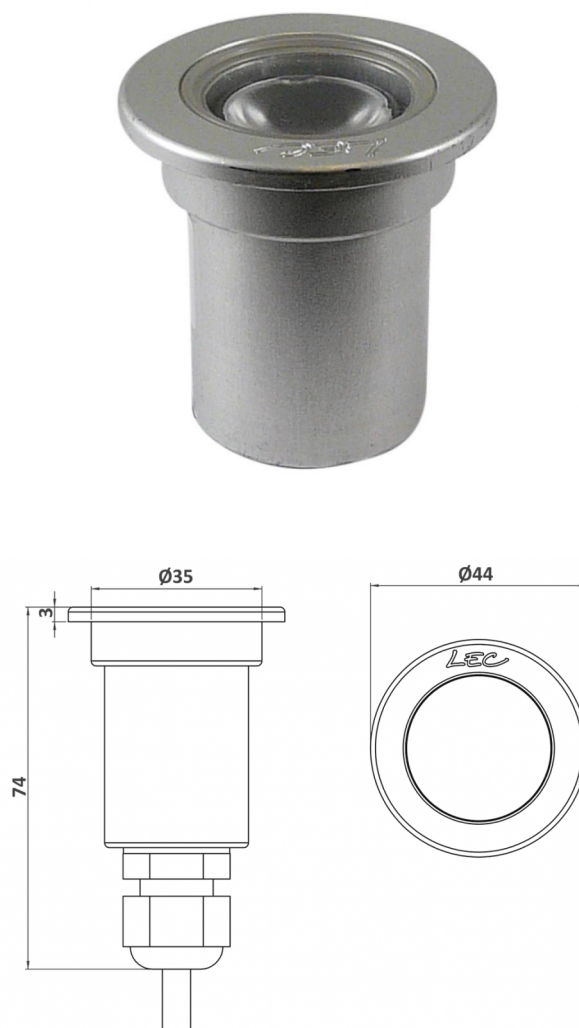

Number of LEDs	3
Type of LEDs	120° SMD LEDs (S), SMD trichro (A)
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), RVB (T)




Select your specific requirements with our product configurator, by filtering technical criteria at the following link:

<http://www.lec-lyon.com/1530rz-bordeaux-r922>

APPLICATION

-  Marker-lighting

CONFIGURATEUR.EMPLACEMENT

-  Wall recessed
-  Pavements sides
-  Masts




CARACTERISTICS

Weight : 125 g



Options of luminous effects

-  RGB options
-  Non adjustable
-  Transparent flat window
-  Colour control system (optional)




Power supply - Control

-  Cable length: 1 m
-  Integrated : 24V-PWM
-  Remote : 24V-0/10V, 24V-DMX, 24V-DALI

Material

-  Anodised glazed aluminium
-  Vandalism-proof, scratch-proof, UV-proof, polycarbonate window, M2

Mechanical strength - Waterproofness

-  Resists impacts up to IK10
-  60J
-  IP68 Tight for extended immersion