# **PRODUCT DATASHEET**



# 5632 ARCHES

This compact linear spotlight is designed to be installed on a windowsill or facade belt-course. Fitted with an 100x12° lens, the uprights and lintel of the windowframe will be illuminated without emitting any unwanted-beams.

For installation on an architectural belt-course, the choice of available lenses allows upward converging beams or uniform wall-washing of the facade despite being installed very close to the facade.

### APPLICATIONS:


- Windowframe lighting
- WallwashingArchitectural heritage
- enhancementPath lighting
- Direct or indirect lighting of public space

# CARACTERISTICS

#### "Mini" version with 3 LEDs

- Colourless anodised machined aluminium body
- Vandalproof organic glass window
- 316L Stainless steel screws
  Thermolacquered paint on request



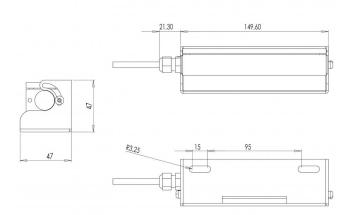

Number of LEDs	3
Type of LEDs	Power LEDs. Contact us for hot countries.
Color(s)	Warm white 2700K (F), Warm white 3000K (E), Neutral white 4000K (N), Cool white 6000K (W), Red (R), Amber (O), Green (V), Blue (L), Royal blue (K)

Select your specific requirements with our product configurator, by filtering technical criteria at the following link: http://www.lec-lyon.com/5632-arches-r2446

# APPLICATION

#### Outdoor lighting

Standard flux : **669 lm** This value is gained from the optimum output of the LED number, inclusive of optic, for a cool white LED (6000K)


#### CONFIGURATEUR.EMPLACEMENT

Wall lights

#### CARACTERISTICS

### **Options of luminous effects**

- (1) Adjustable on 1 axis
  - Rotating beam



Transparent flat window

## **Power supply - Control**

ᠵ Cable length: **1 m** 

 Integrated : 24V-PWM
 Remote : 24V-0/10V, 24V-DMX, 24V-DALI

#### Material

(AL) Anodised glazed aluminium

Vandalism-proof, scratchproof, UV-proof, polycarbonate window, M2

#### **Mechanical strength - Waterproofness**

IK10 Resists impacts up to IK10 20J 20J

**IP67** Tight for temporary immersion

PDF generated on 19.05.2024


www.lec-lyon.com

Technical data is subject to changes. Luminaire guaranteed 5 years. Luminaire designed and manufactured in France.




# 5632 ARCHES


This datasheet gives you all the available optics for this product, consistent with the number of LEDs. **URL of this product:** http://www.lec-lyon.com/5632-arches-r2446




-C0 - C180


-C90 - C270









100x12° (L3)







130x25° (L1)

90

PDF generated on 19.05.2024

www.lec-lyon.com

Technical data is subject to changes. Luminaire guaranteed 5 years. Luminaire designed and manufactured in France.